

CABLE DE ACERO ALMA DE ACERO 6 X 19 IWRC

- Alma de cable independiente (IWRC)
- Trenzado regular derecho (RHRL)
- Alma de acero
- Clasificación 6 X 19
- Acero arado mejorado

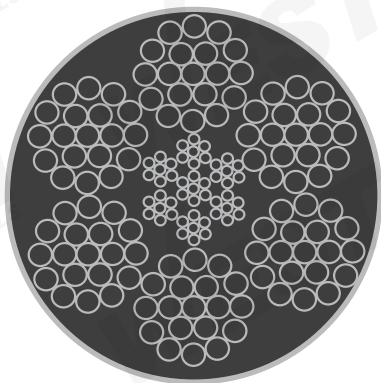


Imagen ilustrativa

CÓDIGO	DIÁMETRO	LARGO (M)	PESO NETO (100M/kg)	FUERZA DE TENSIÓN (N/MM ²)	CAPACIDAD MÁXIMA DE RUPTURA (TON)
B-150	1/4" (6.35 mm)	500	17.3	1,770	2.70
B-155	5/16" (7.93 mm)	500	26.8	1,770	4.20
B-157	5/16" (7.93 mm)	1000	26.8	1,770	4.20
B-160	3/8" (9.525 mm)	500	38.6	1,770	5.90
B-163	3/8" (9.525 mm)	1000	38.6	1,770	5.90
B-165	1/2" (12.7 mm)	500	68.4	1,770	10.40
B-167	1/2" (12.7 mm)	1000	68.4	1,770	10.40
B-170	9/16" (14.28 mm)	500	87.8	1,770	13.20
B-175	5/8" (15.87 mm)	500	107.1	1,770	16.20
B-180	3/4" (19.05 mm)	500	154.7	1,770	23.20
B-181	3/4" (19.05 mm)	475	154.7	1,770	23.20
B-185	7/8" (22.22 mm)	500	211.2	1,770	31.40
B-190	1" (25.4 mm)	500	274.8	1,770	40.70



EMPAQUE