

CABLE DE ACERO ALMA DE ACERO 6 X 26 IWRC

- Alma de cable independiente (IWRC)
- Trenzado regular derecho (RHRL)
- Alma de acero
- Clasificación 6 X 26
- Acero arado mejorado

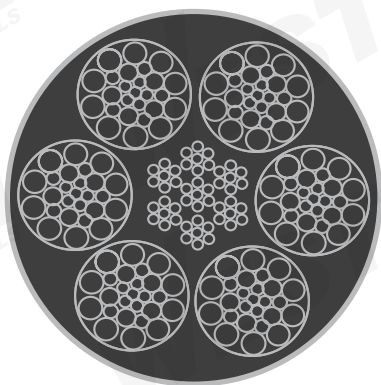


Imagen ilustrativa

CÓDIGO	DIÁMETRO	LARGO	PESO NETO (100m/kg))	FUERZA DE TENSIÓN (N/MM2)	CAPACIDAD MÁXIMA DE RUPTURA (TON)
B-250	1/4" (6.35 mm)	500 m	17.3	1,770	2.7
B-255	5/16" (7.93 mm)	500 m	26.8	1,770	4.2
B-260	3/8" (9.525 mm)	500 m	38.6	1,770	5.9
B-270	1/2" (12.7 mm)	500 m	68.4	1,770	10.4
B-272	9/16" (14.28 mm)	500 m	87.8	1,770	13.2
B-275	5/8" (15.87 mm)	500 m	107.1	1,770	16.2
B-280	3/4" (19.05 mm)	500 m	154.7	1,770	23.2
B-285	7/8" (22.22 mm)	500 m	211.2	1,770	31.4
B-290	1" (25.4 mm)	500 m	274.8	1,770	40.7



EMPAQUE