


TENSOR HORQUILLA A HORQUILLA

WESTON[®]
TOOLS

- Acero galvanizado
- El cuerpo tiene roscas UNC
- Cumple con norma ASME B30.26
- País de origen China

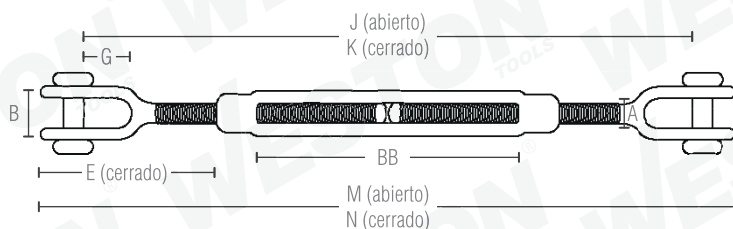

EMPAQUE

CÓDIGO	DIÁMETRO DE ROSCA	LARGO A TENSAR	CARGA LÍMITE DE TRABAJO (lb)	PESO (lb)	MEDIDAS (pulgadas)								
					A	B	E (cerrado)	G	J (abierto)	K (cerrado)	M (abierto)	N (cerrado)	BB
C-00314	1/2"	6"	2200	1.82	0.5	0.64	3.22	1.07	18.65	12.65	20.14	14.14	6.03
C-00316	1/2"	9"	2200	1.98	0.47	0.76	3.11	1.14	23.4	14.96	25	16.46	8.86
C-00317	1/2"	12"	2200	2.42	0.47	0.76	3.11	1.14	30	17.95	31.53	19.29	12
C-00324	5/8"	6"	3500	3.21	0.63	0.79	3.9	1.32	19.74	13.74	21.82	15.82	6.03
C-00329	5/8"	12"	3500	4.58	0.63	0.79	3.89	1.32	32.08	20.08	34.16	22.16	12.39
C-00332	3/4"	6"	5200	4.8	0.75	0.97	4.71	1.52	21.09	15.09	23.68	17.68	6.13
C-00336-1	3/4"	12"	5200	6.72	0.75	0.97	4.68	1.52	33.49	21.49	36.08	24.08	12.59
C-00347	1"	6"	10000	10.4	1	1.34	6.09	2.05	23.82	17.82	27.18	21.18	6.18
C-00352	1"	12"	10000	13.8	1	1.34	6.09	2.05	35.82	23.82	39.18	27.18	12.18
C-00353	1-1/4"	12"	15200	20.3	1.15	2.04	7.28	2.76	38.46	25.75	42.13	29.53	12.13
C-00354	1-1/4"	18"	15200	25.9	1.25	1.84	8.09	2.82	51.37	33.37	55.58	37.58	18.06
C-00357	1-1/2"	24"	21400	43.5	1.5	2.06	8.93	2.81	65.38	41.38	70.3	46.3	24.94
C-00358	1-1/2"	12"	21400	29.8	1.38	2.48	7.99	2.95	38.78	26.54	43.43	30.98	12.17